

STAMP 280 LED 16W

5326

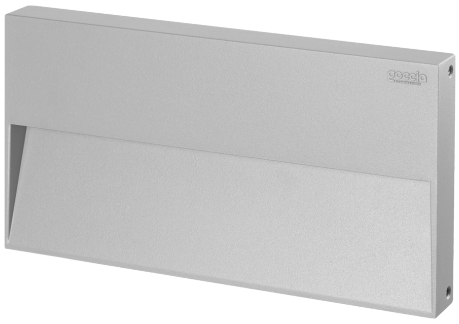

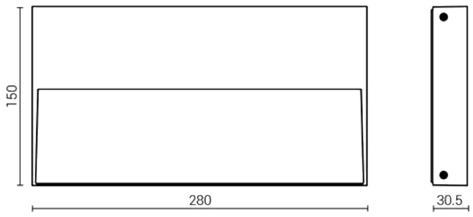

Outdoor wall steplight luminaire

Minimum thickness for surface installation / Recessed installation flush with the wall using backbox optional accessory

Material: low copper content die-cast aluminium

UV resistant polycarbonate diffuser, recessed for an effective reduction of direct glare

Built-in driver

Light source: LED unit

Rear cable entry / Through wiring allowed

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

D* Dimmable version

LV 24÷48V low voltage

Dimensions	280 x 150 x 31 mm
Light source	LED
Wattage	16 W
Power supply	220-240 V | 50/60 Hz
Light source output	2345 lm
System output	936 lm
System efficiency	59 lm/W
Color Rendering Index – CRI	≥80
LED energy class	E (3000K), E (4000K), F (2700K)
LED lifetime	L70 B50 > 50.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 / -2-1
Weight	1.44 kg
Conformity	CE UKCA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE
CO	CORTEN
BR	BRONZE
BI	WHITE

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K


Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

STAMP 280 LED 16W

5326

ACCESSORIES

STAMP
280 BACKBOX



5357

STAMP THE SERIES





