STAMP POST SLIM H 300 LED 4W

5371



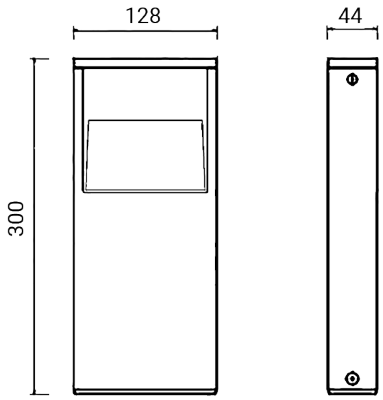

Pole complete with luminaire

Material: aluminium

UV resistant polycarbonate diffuser, recessed for an effective reduction of direct glare

Light source: mains voltage LED module, compatible with phase-cut dimmers

Supplied with H05RN-F pre-wired cable (optional waterproof connections to be ordered separately)

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

24V 24V low voltage

Dimensions	128 x 44 x H 300 mm
Light source	LED
Wattage	4 W
Power supply	220-240 V | 50/60 Hz
Light source output	368 lm
System output	210 lm
System efficiency	53 lm/W
Color Rendering Index – CRI	80
LED energy class	F
LED lifetime	L70 B50 > 50.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 / -2-1
Weight	1.3 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE
CO	CORTEN
BR	BRONZE

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

STAMP POST SLIM H 300 LED 4W

5371

ACCESSORIES

STAMP POST
ANCHOR PLATE L 128



5391

ACCESSORIES
WATERPROOF CONNECTOR



1941

ACCESSORIES
WATERPROOF CONNECTOR



1944

STAMP THE SERIES





