

DOCKS ALUMINIUM – GUARD LED 15W

9121

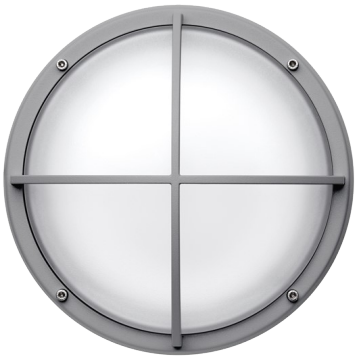

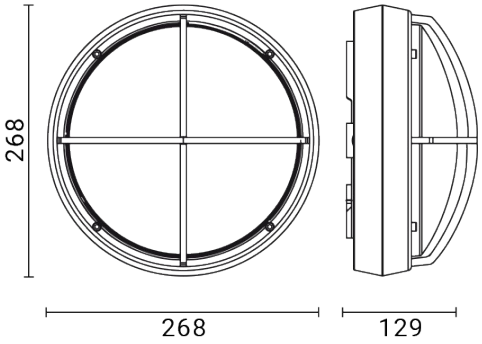

Outdoor luminaire for wall/ceiling installation

Material: housing and base in low copper content die-cast aluminium / Aluminium internal plate

Diffuser: UV resistant opal polycarbonate / Silicone sealing gasket

Built-in driver

Light source: LED unit

Rear cable entry

Stainless steel screws

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

D* Dimmable version

Dimensions	Ø 268 x 129 mm
Light source	LED
Wattage	15 W
Power supply	220-240 V | 50/60 Hz
Light source output	2308 lm
System output	600 lm
System efficiency	40 lm/W
Color Rendering Index – CRI	80
LED energy class	C
LED lifetime	L70 B50 102.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 66
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 / -2-1
Weight	1.93 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH		COLOUR TEMP.	
AG	ALUMINIUM GREY	**27K**	2700K
AN	ANTHRACITE	**3K**	3000K
BI	WHITE	**4K**	4000K