
I-LUX STAINLESS STEEL LED G23 9W

5540



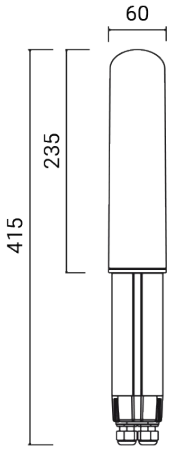

Outdoor luminaire for pole installation

It can be installed on Goccia Illuminazione poles or, using a dedicated adaptor, on Ø 60 mm standard poles

Material: body complete with self-extinguishing technopolymer wiring box / Satin aluminium internal parts / Chromed connection ring

Diffuser: UV resistant opal polycarbonate

Built-in driver

Luminaire supplied with LED G23 light source

Equipped with two M16 cable glands to allow through wiring

Dimensions	Ø 60 x H 415 x H 235 mm
Light source	LED G23
Wattage	9 W
Power supply	220-240 V | 50/60 Hz
Light source output	930 lm
System output	600 lm
System efficiency	67 lm/W
Color Rendering Index – CRI	≥80
LED energy class	F
Electrical insulation class	Class II
IP rating	IP 65
Impact resistance rating	IK 09 (10 Joules)
Norms	EN 60598-1 / -2-1
Weight	0.7 kg
Conformity	CE UKCA

CODE OPTIONS


FINISH		COLOUR TEMP.	
IN	STAINLESS STEEL	**27K**	2700K
		3K	3000K
		4K	4000K

I-LUX STAINLESS STEEL LED G23 9W

5540


ACCESSORIES

ACCESSORIES
STAINLESS STEEL POLE H 375



3511

ACCESSORIES
STAINLESS STEEL POLE H 800



3512

ACCESSORIES
SPIKE



5505

ACCESSORIES
ADAPTOR



5506

ACCESSORIES
ANCHOR PLATE



5519

I-LUX THE SERIES





