
goccia ILLUMINAZIONE

IANUS 120 H 1000 1x LED 8W

7075



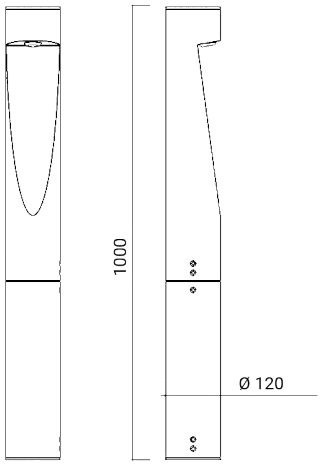

Pole for garden and urban lighting complete with luminaire

Material: low copper content die-cast aluminium

Photo-etched opal polycarbonate lenticular diffuser for a wide and uniform light distribution

Built-in driver

Light source: LED unit

Watertight wiring through the supplied cable that powers the integrated driver. Further M16 cable gland for additional wiring, positioned in the lower part of the closing cap in technopolymer

Color matching side fixing screws in stainless steel

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

CL2	Class II
D*	Dimmable version
LV	24÷48V low voltage

Dimensions	Ø 120 x H 1000 mm
Light source	LED
Wattage	8 W
Power supply	100-240 V | 50/60 Hz
Light source output	951 lm
System output	515 lm
System efficiency	64 lm/W
Color Rendering Index – CRI	80
LED energy class	E
LED lifetime	L80 B10 86.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 66
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 / -2-1
Weight	7.36 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE
BR	BRONZE

on request:

CO	CORTEN

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

IANUS 120 H 1000 1x LED 8W

7075

ACCESSORIES

ACCESSORIES
ANCHOR PLATE



5538

IANUS THE SERIES

