
goccia ILLUMINAZIONE

KASKO oval with guard LED 10W

9182



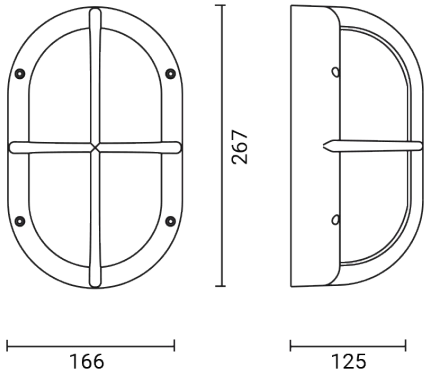

- Outdoor luminaire for wall/ceiling installation
- Material: housing and base in low copper content die-cast aluminium / Aluminium internal plate
- Diffuser: moulded opal glass / Silicone sealing gasket
- Light source: mains voltage LED module, compatible with phase-cut dimmers
- Cable entry from either the rear or the side
- Stainless steel Allen screws
- Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

Dimensions	267 x 166 x 125 mm
Light source	LED
Wattage	10 W
Power supply	220-240 V | 50/60 Hz
Light source output	1125 lm
System output	470 lm
System efficiency	47 lm/W
Color Rendering Index – CRI	≥80
LED energy class	E (4000K), F (2700K), F (3000K)
LED lifetime	L70 B10 > 45.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 / -2-1
Weight	1.82 kg
Conformity	CE UKCA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE
BI	WHITE

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

KASKO oval with guard LED 10W

9182

KASKO THE SERIES

