
KASKO oval with eyelid LED 10W

9186



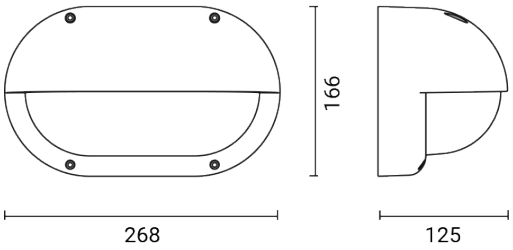

Outdoor luminaire for wall installation

Material: housing and base in low copper content die-cast aluminium / Aluminium internal plate

Diffuser: moulded opal glass / Silicone sealing gasket

Light source: mains voltage LED module, compatible with phase-cut dimmers

Cable entry from either the rear or the side

Stainless steel Allen screws

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

Dimensions	268 x 166 x 125 mm
Light source	LED
Wattage	10 W
Power supply	220-240 V | 50/60 Hz
Light source output	1125 lm
System output	234 lm
System efficiency	23 lm/W
Color Rendering Index – CRI	≥80
LED energy class	E (4000K), F (2700K), F (3000K)
LED lifetime	L70 B10 > 45.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 / -2-1
Weight	1.84 kg
Conformity	CE UKCA

CODE OPTIONS

FINISH		COLOUR TEMP.	
AG	ALUMINIUM GREY	**27K**	2700K
AN	ANTHRACITE	**3K**	3000K
BI	WHITE	**4K**	4000K

Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

KASKO oval with eyelid LED 10W

9186

KASKO THE SERIES

