
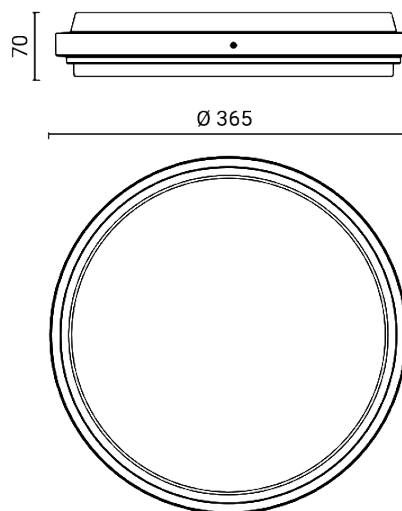


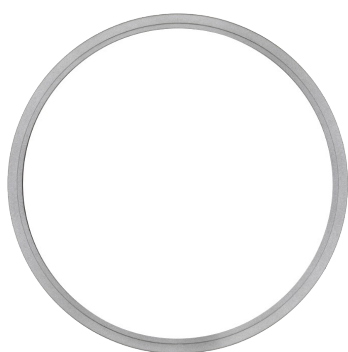

Outdoor luminaire for wall/ceiling installation

Minimum thickness

Material: housing in low copper content die-cast aluminium /
Internal wire holder plate in 99,8 aluminium

Diffuser: UV resistant opal polycarbonate / Silicone sealing
gasket

Driver + 3h emergency unit inside

Light source: LED unit

Suitable for through wiring by double cable entry

No visible frontal screws

Finish with double painting (epoxy-based primer and polyester
powder coating) after anti-corrosion treatments

On request versions (additional code):

S Version with sensor

D* Dimmable version

Dimensions	Ø 365 x 70 mm
Light source	LED
Light source info	Emergency 2W
Wattage	29 W
Power supply	220-240 V 50/60 Hz
Light source output	4400 lm
System output	3275 lm
System efficiency	113 lm/W
Color Rendering Index – CRI	80
LED energy class	D
LED lifetime	L80 B20 > 80.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 +2-1 +2-22
Weight	3.1 kg
Conformity	CE UK CA

CODE OPTIONS


FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE
CO	CORTEN
BR	BRONZE
BI	WHITE

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

ACCESSORIES



LUNETTE

THE SERIES

