


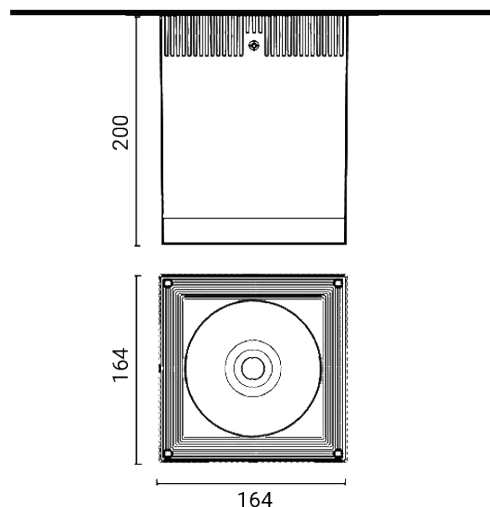

Outdoor luminaire for ceiling installation

Material: housing and glass holding frame in low copper content die-cast aluminium

Diffuser: ultra-white transparent tempered glass

Built-in driver

Light source: LED unit

Rear cable entry

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

D* Dimmable version

Dimensions	164 x 164 x H 200 mm
Light source	LED
Wattage	23 W
Power supply	220-240 V 50/60 Hz
Light source output	3329 lm
System output	2434 lm
System efficiency	106 lm/W
Color Rendering Index – CRI	≥80
LED energy class	E
LED lifetime	L80 B10 86.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class II
IP rating	IP 65
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 +2-1
Weight	4.4 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE
BI	WHITE

on request:

CO	CORTEN
BR	BRONZE

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

OPTIC

standard 38°

optional optics

18	18°
70	70°

LUX SHOWER

THE SERIES

