
goccia ILLUMINAZIONE

LUX SHOWER 30 LED 10W

1221



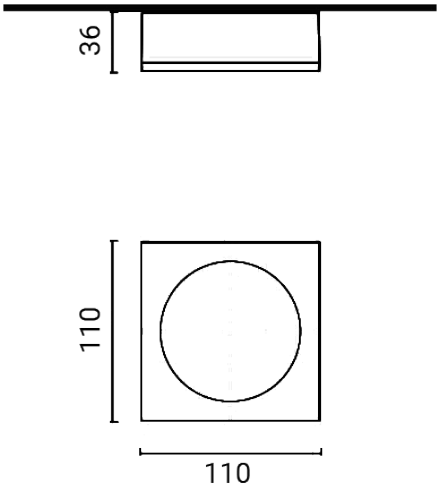

Outdoor luminaire for ceiling installation

Material: housing and glass holding frame in low copper content die-cast aluminium

Diffuser: ultra-white transparent tempered glass

Light source: mains voltage LED module, compatible with phase-cut dimmers

Rear cable entry / Spacer optional accessory for side cable entry

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

24V 24V low voltage

Dimensions	110 x 110 x H 36 mm
Light source	LED
Wattage	10 W
Power supply	220-240 V | 50/60 Hz
Light source output	1125 lm
System output	750 lm
System efficiency	75 lm/W
Color Rendering Index – CRI	≥80
LED energy class	E (4000K), F (2700K), F (3000K)
LED lifetime	L70 B10 > 45.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 / -2-1
Weight	0.46 kg
Conformity	CE UKCA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE
BI	WHITE

on request:

CO	CORTEN
BR	BRONZE

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

OPTIC

standard	40°

optional optics

12	12°
90	90°

goccia ILLUMINAZIONE

Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

IMQ CERTIFIED QUALITY MANAGEMENT SYSTEM ISO 9001:2015

IQNET RECOGNIZED CERTIFICATION

LUX SHOWER 30 LED 10W

1221

LUX SHOWER THE SERIES



