


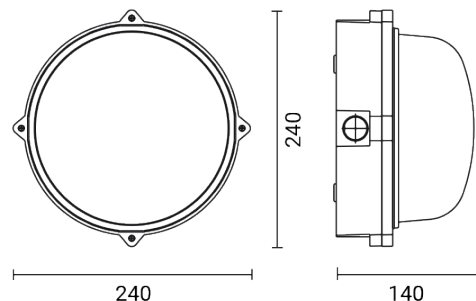

Outdoor luminaire for wall/ceiling installation

Material: polycarbonate ring and housing / Pre-wired 99,8 polished aluminium reflector

Diffuser: opal glass

Luminaire supplied without light source

Rear or side cable entry by means of gland or conduit / Through wiring allowed

Stainless steel cross-head screws

Finish: UV resistant spray painting with polyurethane resins

|                             |                      |
|-----------------------------|----------------------|
| Dimensions                  | Ø 240 x 140 mm       |
| Light source                | E27                  |
| Light source info           | L < 138 mm           |
| Wattage                     | 100 W                |
| Power supply                | 220-240 V   50/60 Hz |
| Electrical insulation class | Class I              |
| IP rating                   | IP 65                |
| Impact resistance rating    | IK 08 (5 Joules)     |
| Norms                       | EN 60598-1 +2-1      |
| Weight                      | 1.7 kg               |
| Conformity                  | CE UK CA             |

## CODE OPTIONS

### FINISH

**AN** ANTHRACITE  
**BI** WHITE



**MARINA**

THE SERIES

