
goccia ILLUMINAZIONE

PASSUM DOWNLIGHT Ø 70 LED 3W

1470





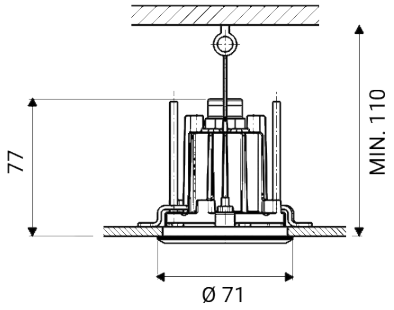

Outdoor ceiling recessed luminaire

Suitable to be installed on false ceilings / Fastening brackets for false ceiling with thickness from 5 to 50 mm / False ceiling hole Ø min. 65 mm - Ø max. 66 mm

Aluminium closing flange supplied

Material: low copper content die-cast aluminium

Diffuser: ultra-white transparent tempered glass

External 24 Vdc driver for parallel connection, compliant with EN 61347-2-13 Standard, to be ordered separately

PWM dimmable with dedicated external driver, compliant with EN 61347-2-13 Standard, to be ordered separately

Light source: LED unit

Fixed optics

Pre-wired with 0,2 m silicone cable and heat-shrinkable insulation connectors / Safety cable supplied

Stainless steel screws

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

Dimensions	Ø 71 x H 77 x H2 >110 mm
Light source	LED
Wattage	3 W
Power supply	24 Vdc
Light source output	300 lm
System output	162 lm
System efficiency	54 lm/W
Color Rendering Index – CRI	80
LED energy class	C (4000K), D (2700K), D (3000K)
LED lifetime	L70 B50 > 60.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class III
IP rating	IP 65/67
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 / -2-2
Weight	0.21 kg
Conformity	CE UKCA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE

on request:

IN	STAINLESS STEEL

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

OPTIC

standard	38°

optional optics

18	18°
90	90°

goccia ILLUMINAZIONE

Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

IMQ CERTIFIED QUALITY MANAGEMENT SYSTEM ISO 9001:2015

IQNET RECOGNIZED CERTIFICATION

PASSUM DOWNLIGHT Ø 70 LED 3W

1470

ACCESSORIES

ACCESSORIES
24V DRIVER – 24W



1924

ACCESSORIES
24V DRIVER – 60W



1925

ACCESSORIES
PWM DRIVER



1953

PASSUM DOWNLIGHT THE SERIES





