
goccia ILLUMINAZIONE

PASSUM DOWNLIGHT Ø 125 LED 8W

1472



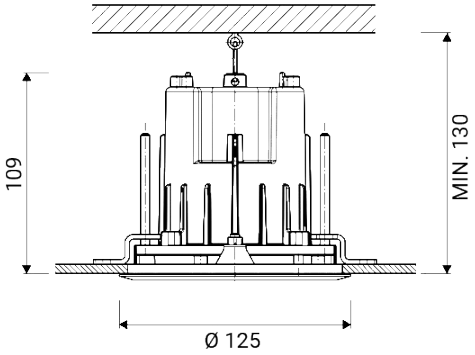

Outdoor ceiling recessed luminaire

Suitable to be installed on false ceilings / Fastening brackets for false ceiling with thickness from 5 to 50 mm / False ceiling hole Ø min. 115 mm - Ø max. 116 mm

Aluminium closing flange supplied

Material: low copper content die-cast aluminium

Diffuser: ultra-white transparent tempered glass

Built-in driver

Light source: LED unit

Adjustable optics ±15°

Pre-wired with 0,5 m H07RN-F buriable cable (optional waterproof connections to be ordered separately) / Safety cable supplied

Stainless steel screws

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

D*	Dimmable version
**V	10÷52V low voltage
RGBW	RGBW version

Dimensions	Ø 125 x H 109 x H2 >130 mm
Light source	LED
Wattage	8 W
Power supply	100-240 V | 50/60 Hz
Light source output	951 lm
System output	636 lm
System efficiency	80 lm/W
Color Rendering Index – CRI	80
LED energy class	E
LED lifetime	L80 B10 86.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65/67
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 / -2-2
Weight	0.8 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE

on request:

IN	STAINLESS STEEL

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

OPTIC

standard	38°

optional optics

18	18°
90	90°

PASSUM DOWNLIGHT Ø 125 LED 8W

1472

ACCESSORIES

ACCESSORIES
WATERPROOF CONNECTOR



1941

ACCESSORIES
WATERPROOF CONNECTOR



1944

ACCESSORIES
WATERPROOF CONNECTOR



1942

PASSUM DOWNLIGHT THE SERIES





