
PASSUM SPOT Ø 180 STAINLESS STEEL + ALUMINIUM COVER LED 8W

1488



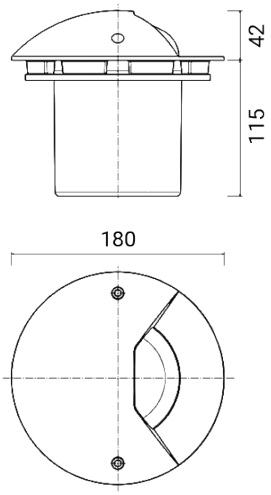

Outdoor ground/wall recessed luminaire

Max. load pressure 2.000 kg (in-ground box + luminaire + covering canopy together for drive-over use)

Material: AISI 316L stainless steel housing / Low copper content die-cast aluminium covering canopy

Diffuser: UV resistant polycarbonate

Built-in driver

Light source: LED unit

Adjustable optics 0÷45°

Pre-wired with 0,5 m H07RN-F buriable cable (optional waterproof connections to be ordered separately)

Stainless steel Allen screws

On request versions (additional code):
D* Dimmable version

Dimensions	Ø 180 x H 157 mm
Light source	LED
Wattage	8 W
Power supply	220-240 V | 50/60 Hz
Light source output	850 lm
System output	605 lm
System efficiency	76 lm/W
Color Rendering Index – CRI	80
LED energy class	C (4000K), D (3000K)
LED lifetime	L70 B50 > 50.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65/67
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 / -2-13
Weight	2.3 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE

COLOUR TEMP.

3K	3000K
4K	4000K

OPTIC

standard	40°

optional optics

12	12°

PASSUM SPOT Ø 180 STAINLESS STEEL + ALUMINIUM COVER LED 8W

1488

COMPONENTS

PASSUM
Ø 180 IN-GROUND BOX



1431

ACCESSORIES

ACCESSORIES
WATERPROOF CONNECTOR



1941

ACCESSORIES
WATERPROOF CONNECTOR



1944

ACCESSORIES
WATERPROOF CONNECTOR



1942

PASSUM SPOT THE SERIES



