
goccia ILLUMINAZIONE

PASSUM UP Ø 125 stainless steel LED 4W

1495



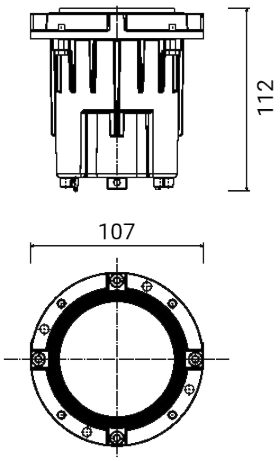

Outdoor ground/wall recessed luminaire

Max. load pressure 2.000 kg (in-ground box + luminaire + covering flange together for drive-over use)

Material: AISI 316L stainless steel

Diffuser: ultra-white transparent tempered glass

Built-in driver

Light source: LED unit

Adjustable optics ±15°

Pre-wired with 0,5 m H07RN-F buriable cable (optional waterproof connections to be ordered separately)

On request versions (additional code):

D* Dimmable version

LV 10÷52V low voltage

Dimensions	Ø 107 x H 112 mm
Light source	LED
Wattage	4 W
Power supply	100-240 V | 50/60 Hz
Light source output	470 lm
System output	289 lm
System efficiency	72 lm/W
Color Rendering Index – CRI	80
LED energy class	E (3000K), E (4000K), F (2700K)
LED lifetime	L80 B10 86.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65/67
Impact resistance rating	IK 10 (20 joules)
Diffuser contact temperature	≤ 40°C
Norms	EN 60598-1 / -2-13
Weight	0.70 kg
Conformity	CE UK CA

CODE OPTIONS

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

OPTIC

standard	38°

optional optics

18	18°
90	90°

goccia ILLUMINAZIONE

Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

IMQ CERTIFIED QUALITY MANAGEMENT SYSTEM ISO 9001:2015

IQNET RECOGNIZED CERTIFICATION

PASSUM UP Ø 125 stainless steel LED 4W

1495

COMPONENTS

PASSUM
Ø 125 IN-GROUND BOX



1421

PASSUM UP
Ø 125 STAINLESS STEEL ROUND FLANGE



1522

PASSUM UP
Ø 125 STAINLESS STEEL SQUARE FLANGE



1523

ACCESSORIES

ACCESSORIES
WATERPROOF CONNECTOR



1941

ACCESSORIES
WATERPROOF CONNECTOR



1944

ACCESSORIES
WATERPROOF CONNECTOR



1942

PASSUM UP THE SERIES







