
goccia ILLUMINAZIONE

PROTO STRADA LED 25W

4937



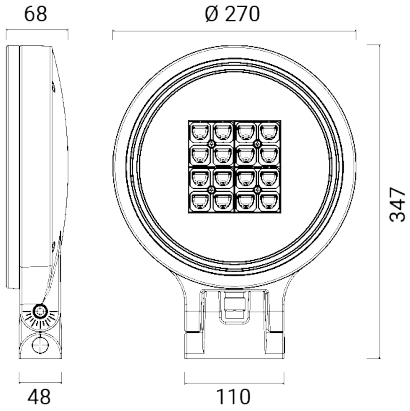

- Outdoor projector for wall, pole and ground installation
- Adjustable hooking bracket
- Material: low copper content die-cast aluminium
- Diffuser: ultra-white transparent tempered glass, sealed to the frame
- Built-in driver
- Light source: highly performing LED modules
- Supplied with 1 m cable
- Optional surge protection device (SPD) to be ordered separately
- Color matching side fixing screws in stainless steel
- Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

D*	Dimmable version
D6	Midnight function
MT4	4 m cable length for pole mounting

Dimensions	Ø 270 x 347 x 68 mm
Light source	LED
Wattage	25 W
Power supply	220-240 V | 50/60 Hz
Light source output	3008 lm
System output	2626 lm
System efficiency	105 lm/W
Color Rendering Index – CRI	80
LED energy class	D
LED lifetime	L90 B10 > 100.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 66
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 / -2-5
Weight	4 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

OPTIC

standard	100°

optional optics

O4	120° X 45°
O2	150° X 45°
O5	150° X 70°
O1	17°
O3	90° X 30°

goccia ILLUMINAZIONE

Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

IMQ CERTIFIED QUALITY MANAGEMENT SYSTEM ISO 9001:2015
IQNET RECOGNIZED CERTIFICATION

PROTO STRADA LED 25W

4937

ACCESSORIES

ACCESSORIES
SPD



1965

ACCESSORIES
POLE H 2500 – BURIABLE

3504

ACCESSORIES
POLE H 3000 – BURIABLE

3505

PROTO
SINGLE POLE CONNECTION



5061

PROTO
DOUBLE POLE CONNECTION



5062

ACCESSORIES
POLE H 3500 – BURIABLE

3506