# SERVER POINT 1 - CEE 17

## 5303



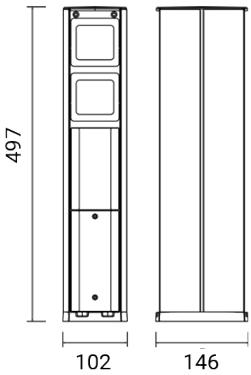


Outdoor double-sided modular distribution tower

Two spring-loaded panels containing two industrial CEE 17 16A sockets 220-250V 50/60Hz / Two additional empty panels on the back

Material: extruded aluminium / Base and head in die-cast aluminium

Two switching boxes complete with terminal board

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

** Industrial sockets 3P+T 380-415V 50/60Hz

| | |
|---|---|
| Dimensions | 146 x 102 x H 497 mm |
| Power supply | 220-250 V \| 50/60 Hz |
| IP rating | IP 44 |
| Norms | EN 61439-1 |
| Weight | 1.96 kg |
| Conformity | CE UK CA |

## CODE OPTIONS

### FINISH

**AN** ANTHRACITE

# SERVER POINT 1 - CEE 17

## 5303

ACCESSORIES

**SERVER POINT**
PIR SENSOR



5308

**SERVER POINT**
ANCHOR PLATE



5309

**SERVER POINT**
LED PATH MARKER



5315

**SERVER POINT** THE SERIES





