
SQUEEZE UP 59 LED 3W – 24V

1451



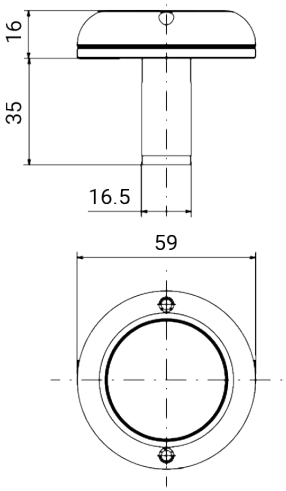

Outdoor walk-over luminaire for ground surface installation

Max. load pressure 500 kg

Material: low copper content die-cast aluminium

Diffuser: UV resistant opal polycarbonate

External 24 Vdc driver for parallel connection, compliant with EN 61347-2-13 Standard, to be ordered separately

PWM dimmable with dedicated external driver, compliant with EN 61347-2-13 Standard, to be ordered separately

Light source: LED unit

Anticorodal anodized aluminium cable gland with watertight internal resin coating - AQUASTOP system / Luminaire supplied with 1,5 m polyurethane buriable cable 2x0,8

Stainless steel screws

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

MT7 7 m cable length

Dimensions	Ø 59 x H 16 mm
Light source	LED
Wattage	3 W
Power supply	24 Vdc
Light source output	300 lm
System output	157 lm
System efficiency	52 lm/W
Color Rendering Index – CRI	80
LED energy class	C (4000K), D (3000K)
LED lifetime	L70 B50 > 60.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class III
IP rating	IP 67
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 / -2-1
Weight	0.1 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE

on request:

CO	CORTEN
BR	BRONZE

COLOUR TEMP.

3K	3000K
4K	4000K

SQUEEZE UP 59 LED 3W – 24V

1451

ACCESSORIES

ACCESSORIES
24V DRIVER – 24W



1924

ACCESSORIES
24V DRIVER – 60W



1925

ACCESSORIES
PWM DRIVER



1953

SQUEEZE THE SERIES





