

goccia ILLUMINAZIONE

SQUEEZE 77 1x70° LED 3W – 24V

1453



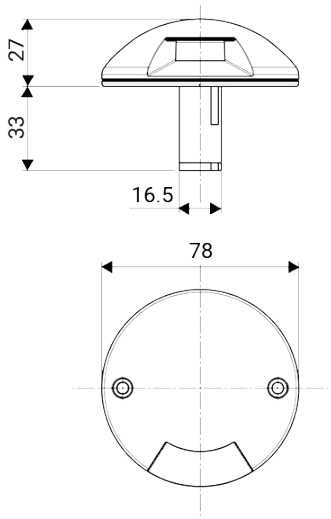

Outdoor walk-over luminaire for ground surface installation

Max. load pressure 500 kg

Material: low copper content die-cast aluminium

Diffuser: UV resistant opal polycarbonate

External 24 Vdc driver for parallel connection, compliant with EN 61347-2-13 Standard, to be ordered separately

PWM dimmable with dedicated external driver, compliant with EN 61347-2-13 Standard, to be ordered separately

Light source: LED unit

Side emitter optic to direct the light along the ground surface

Anticorodal anodized aluminium cable gland with watertight internal resin coating - AQUASTOP system / Luminaire supplied with 1,5 m polyurethane buriable cable 2x0,8

Stainless steel screws

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):
MT7 7 m cable length

Dimensions	Ø 78 x H 27 mm
Light source	LED
Wattage	3 W
Power supply	24 Vdc
Light source output	300 lm
System output	65 lm
System efficiency	22 lm/W
Color Rendering Index – CRI	≥80
LED energy class	D
LED lifetime	L70 B50 > 50.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class III
IP rating	IP 67
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 / -2-1
Weight	0.25 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE

on request:

CO	CORTEN
BR	BRONZE

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K