
# SQUEEZE 180 4x70° LED 12.8W – 24V

## 1459



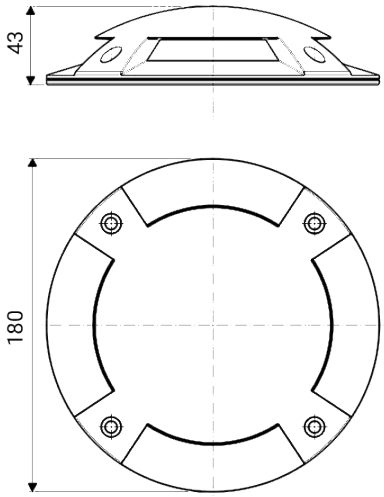


Outdoor walk-over luminaire for ground surface installation

Max. load pressure 500 kg

Material: low copper content die-cast aluminium

Diffuser: UV resistant opal polycarbonate

External 24 Vdc driver for parallel connection, compliant with EN 61347-2-13 Standard, to be ordered separately

PWM dimmable with dedicated external driver, compliant with EN 61347-2-13 Standard, to be ordered separately

Light source: LED unit

Anticorodal anodized aluminium cable gland with watertight internal resin coating - AQUASTOP system / Luminaire supplied with 1,5 m polyurethane buriable cable 2x0,8

Stainless steel screws

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

MT7 7 m cable length

| | |
|---|---|
| Dimensions | Ø 180 x H 43 mm |
| Light source | LED |
| Multiple sources | 4x |
| Wattage | 12.8 W |
| Power supply | 24 Vdc |
| Light source output | 1280 lm |
| System output | 215 lm |
| System efficiency | 17 lm/W |
| Color Rendering Index – CRI | ≥80 |
| LED energy class | G |
| Electrical insulation class | Class III |
| IP rating | IP 67 |
| Impact resistance rating | IK 10 (20 joules) |
| Norms | EN 60598-1 / -2-1 |
| Weight | 0.90 kg |
| Conformity | CE UKCA |

## CODE OPTIONS

### FINISH

| | |
|---|---|
| **AG** | ALUMINIUM GREY |
| **AN** | ANTHRACITE |

on request:

| | |
|---|---|
| **CO** | CORTEN |
| **BR** | BRONZE |

### COLOUR TEMP.

| | |
|---|---|
| **3K** | 3000K |
| **4K** | 4000K |

**Goccia Illuminazione srl**
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

# SQUEEZE 180 4x70° LED 12.8W – 24V

## 1459

## ACCESSORIES

**ACCESSORIES**
24V DRIVER – 24W



1924

**ACCESSORIES**
24V DRIVER – 60W



1925

**ACCESSORIES**
PWM DRIVER



1953

## SQUEEZE THE SERIES





