
goccia ILLUMINAZIONE

SQUEEZE 180 2x70° LED 8W – 230V

1468



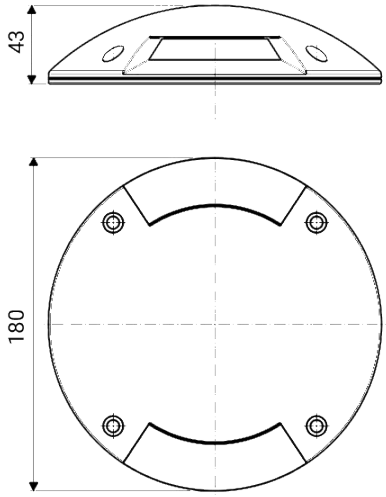

Outdoor walk-over luminaire for ground surface installation

Max. load pressure 500 kg

Material: low copper content die-cast aluminium

Diffuser: UV resistant opal polycarbonate

Light source: mains voltage LED module, compatible with phase-cut dimmers

Anticorodal anodized aluminium cable gland with watertight internal resin coating - AQUASTOP system / Luminaire supplied with 1,5 m polyurethane buriable cable 3x1 H07RN-F

Stainless steel screws

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):
MT7 7 m cable length

Dimensions	Ø 180 x H 43 mm
Light source	LED
Multiple sources	2x
Wattage	8 W
Power supply	220-240 V | 50/60 Hz
Light source output	736 lm
System output	188 lm
System efficiency	24 lm/W
Color Rendering Index – CRI	80
LED energy class	F
LED lifetime	L70 B50 > 50.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 67
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 / -2-1
Weight	1.13 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE

on request:

CO	CORTEN
BR	BRONZE

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

goccia ILLUMINAZIONE

Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

IMQ CERTIFIED QUALITY MANAGEMENT SYSTEM ISO 9001:2015

IQNET RECOGNIZED CERTIFICATION

SQUEEZE 180 2x70° LED 8W – 230V

1468

SQUEEZE THE SERIES



