
STAMP GLASS LED 6W

5331



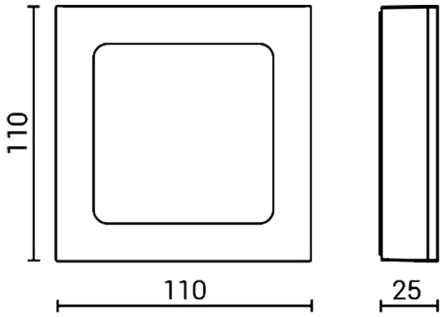

Outdoor wall steplight luminaire

Minimum thickness for surface installation / Recessed installation flush with the wall using backbox optional accessory

Material: low copper content die-cast aluminium

Diffuser: ultra-white opal tempered glass

External 24 Vdc driver for parallel connection, compliant with EN 61347-2-13 Standard, to be ordered separately

Light source: LED unit

Rear single cable entry / Spacer optional accessory for side cable entry

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

Dimensions	110 x 110 x 25 mm
Light source	LED
Wattage	6 W
Power supply	24 Vdc
Light source output	698 lm
System output	302 lm
System efficiency	50 lm/W
Color Rendering Index – CRI	80
LED energy class	F
LED lifetime	L70 B50 > 54.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class III
IP rating	IP 65
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 / -2-1
Weight	0.47 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE
BI	WHITE

COLOUR TEMP.

3K	3000K
4K	4000K

STAMP GLASS LED 6W

5331

ACCESSORIES

STAMP
SPACER



5351

STAMP
FIXING BRACKET



5360

STAMP
110 & GLASS – BACKBOX



5358

ACCESSORIES
24V DRIVER – 24W



1924

ACCESSORIES
24V DRIVER – 60W



1925