
STAMP POST GLASS H 600 LED 6W

5375



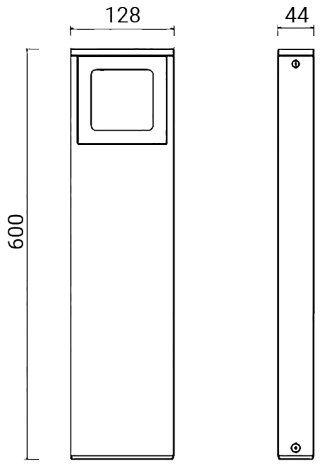

Pole complete with luminaire

Material: aluminium

Diffuser: ultra-white opal tempered glass

External 24 Vdc driver for parallel connection, compliant with EN 61347-2-13 Standard, to be ordered separately

Light source: LED unit

Supplied with H05RN-F pre-wired cable (optional waterproof connections to be ordered separately)

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

Dimensions	128 x 44 x H 600 mm
Light source	LED
Wattage	6 W
Power supply	24 Vdc
Light source output	698 lm
System output	302 lm
System efficiency	50 lm/W
Color Rendering Index – CRI	80
LED energy class	F
LED lifetime	L70 B50 > 54.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class III
IP rating	IP 65
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 / -2-1
Weight	2.2 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE
BI	WHITE

COLOUR TEMP.

3K	3000K
4K	4000K

STAMP POST GLASS H 600 LED 6W

5375

ACCESSORIES

STAMP POST
ANCHOR PLATE L 128



5391

STAMP
SPACER



5351

STAMP
FIXING BRACKET



5360

STAMP
110 & GLASS – BACKBOX



5358

ACCESSORIES
WATERPROOF CONNECTOR



1941

ACCESSORIES
WATERPROOF CONNECTOR



1944

ACCESSORIES
24V DRIVER – 24W



1924

ACCESSORIES
24V DRIVER – 60W



1925