


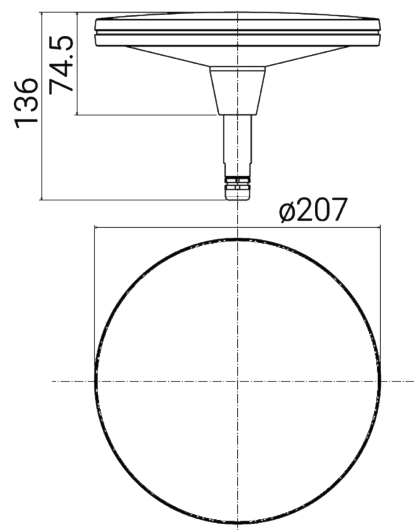

Outdoor luminaire for stem installation

The Ø 200 version is recommended for 600 mm high stem (code 3102) and 900 mm high stem (code 3103)

Material: dissipating upper disc in low copper content die-cast aluminium; the particular convex shape avoids water stagnation

Photo-etched polycarbonate diffuser to prevent horizontal glare and to grant high output downwards

Light source: mains voltage LED module, compatible with phase-cut dimmers

Watertight wiring through 1,5 m cable supplied

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

24V 24V low voltage

MT7 7 m cable length

Dimensions	Ø 207 x H 75 mm
Light source	LED
Wattage	20 W
Power supply	220-240 V 50/60 Hz
Light source output	2400 lm
System output	1602 lm
System efficiency	80 lm/W
Color Rendering Index – CRI	80
LED energy class	E (3000K), E (4000K), F (2700K)
LED lifetime	L70 B50 > 50.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65
Impact resistance rating	IK 09 (10 Joules)
Norms	EN 60598-1 +2-1
Weight	1.53 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE
CO	CORTEN
BR	BRONZE
VE	GREEN

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

COMPONENTS

T-LUX STAN STEM H 300  3101	T-LUX STAN STEM H 600  3102	T-LUX STAN STEM H 900  3103
--	--	--

ACCESSORIES

ACCESSORIES SPIKE  4696	ACCESSORIES ANCHOR PLATE  4697	ACCESSORIES IN-GROUND BOX  4698
--	---	--

T-LUX

THE SERIES

