


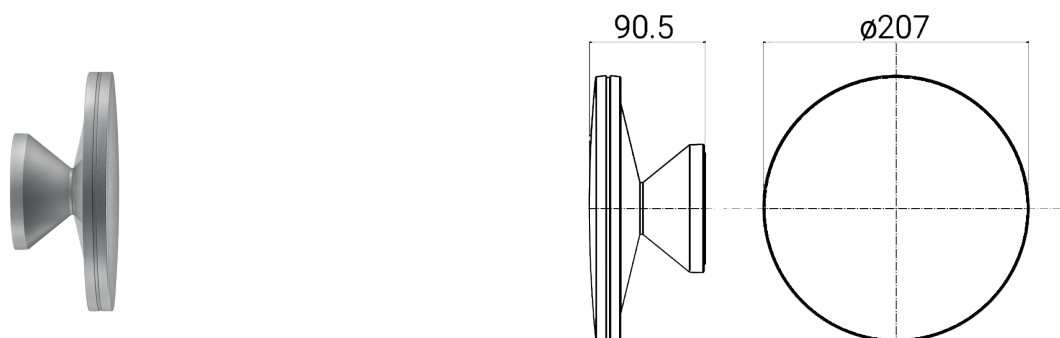

Outdoor luminaire for wall installation

Material: dissipating disc in low copper content die-cast aluminium / Cone in low copper content die-cast aluminium; its harmonious shape contains the wiring and guides the luminous flux towards the wall

Photo-etched polycarbonate diffuser to prevent side glare and to grant a homogeneous effect with 360° diffused light

Light source: mains voltage LED module, compatible with phase-cut dimmers

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

**24V** 24V low voltage

|                                          |                                 |
|------------------------------------------|---------------------------------|
| Dimensions                               | Ø 207 x 91 mm                   |
| Light source                             | LED                             |
| Wattage                                  | 20 W                            |
| Power supply                             | 220-240 V   50/60 Hz            |
| Light source output                      | 2400 lm                         |
| System output                            | 1360 lm                         |
| System efficiency                        | 68 lm/W                         |
| Color Rendering Index – CRI              | 80                              |
| LED energy class                         | E (3000K), E (4000K), F (2700K) |
| LED lifetime                             | L70 B50 > 50.000 h              |
| Standard Deviation Color Matching (SDCM) | MacAdam step 3                  |
| Electrical insulation class              | Class I                         |
| IP rating                                | IP 65                           |
| Impact resistance rating                 | IK 09 (10 Joules)               |
| Norms                                    | EN 60598-1 +2-1                 |
| Weight                                   | 1.1 kg                          |
| Conformity                               | CE UK CA                        |

## CODE OPTIONS

### FINISH

|           |                |
|-----------|----------------|
| <b>AG</b> | ALUMINIUM GREY |
| <b>AN</b> | ANTHRACITE     |
| <b>CO</b> | CORTEN         |
| <b>BR</b> | BRONZE         |
| <b>BI</b> | WHITE          |

### COLOUR TEMP.

|            |       |
|------------|-------|
| <b>27K</b> | 2700K |
| <b>3K</b>  | 3000K |
| <b>4K</b>  | 4000K |

T-LUX

THE SERIES

