
TRIANGOLO SMALL LED 16W

4220



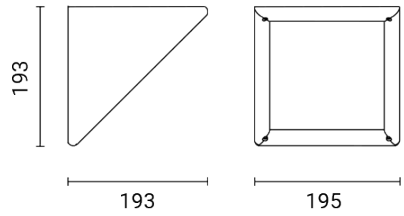

- Outdoor luminaire for wall installation
- Material: polycarbonate
- Diffuser: ultra-white opal tempered glass
- Built-in driver
- Light source: linear LED module
- Rear cable entry
- Stainless steel cross-head screws
- Finish: UV resistant spray painting with polyurethane resins

Dimensions	193 x 193 x 195 mm
Light source	LED
Wattage	16 W
Power supply	220-240 V | 50/60 Hz
Light source output	2320 lm
System output	1300 lm
System efficiency	81 lm/W
Color Rendering Index – CRI	80
LED energy class	D
LED lifetime	L80 B20 > 80.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 / -2-1
Weight	1.4 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

TRIANGOLO SMALL LED 16W

4220

TRIANGOLO THE SERIES

