goccia ILLUMINAZIONE

VOLTO LED 26W

5863



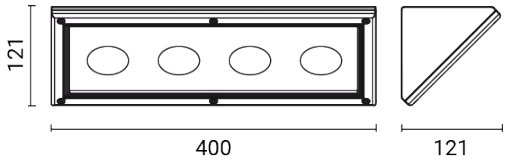

Outdoor luminaire for wall installation

Adjustable upwards or downwards

Material: housing and glass holding frame in low copper content die-cast aluminium

Diffuser: transparent tempered glass

Built-in driver

Light source: 4 LED units

Rear cable entry

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

D* Dimmable version

Dimensions	121 x 121 x 400 mm
Light source	LED
Multiple sources	4x
Wattage	26 W
Power supply	220-240 V | 50/60 Hz
Light source output	3804 lm
System output	2868 lm
System efficiency	110 lm/W
Color Rendering Index – CRI	80
LED energy class	E
LED lifetime	L80 B10 86.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 / -2-1
Weight	3.1 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
NE	BLACK

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

OPTIC

standard 24°

optional optics

ASY	ASYMMETRIC
16	16°
60	60°

VOLTO LED 26W

5863

ACCESSORIES

VOLTO
TILTING BRACKETS



5066

VOLTO
ADJUSTABLE ARMS



5081

VOLTO
LOUVERS



5864

VOLTO THE SERIES



