
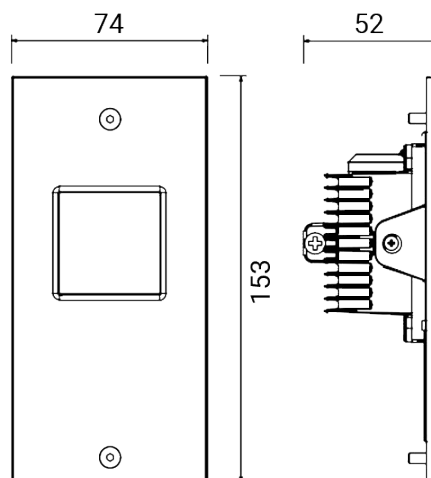




Outdoor luminaire with diffused light for pole installation

Material: die-cast aluminium

Diffuser: UV resistant polycarbonate

Light source: mains voltage LED module, compatible with phase-cut dimmers

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments


Dimensions	74 x 153 x 52 mm
Light source	LED
Wattage	8 W
Power supply	220-240 V 50/60 Hz
Light source output	835 lm
System output	423 lm
System efficiency	53 lm/W
Color Rendering Index – CRI	≥80
LED energy class	F (3000K), F (4000K), G (2700K)
LED lifetime	L70 B10 > 45.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 +2-1
Weight	0.36 kg
Conformity	CE UK CA

STANDING backlight LED 8W

5528



FIXTURES RELATED



CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE
CO	CORTEN
BR	BRONZE

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K