


KYKLO APPLIQUE Ø 90 LED 8W

1250

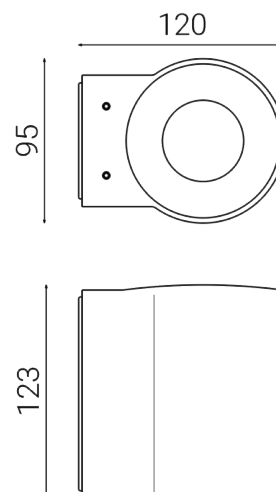

Outdoor luminaire for wall installation
Material: low copper content die-cast aluminium
Ultra-white transparent tempered glass flush diffuser
Built-in driver
Light source: LED unit
Rear cable entry
Stainless steel screws
Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

D* Dimmable version

24V 24V low voltage

Dimensions	95 x 120 x H 123 mm
Light source	LED
Wattage	8 W
Power supply	100-240 V 50/60 Hz
Light source output	951 lm
System output	840 lm
System efficiency	105 lm/W
Color Rendering Index – CRI	80
LED energy class	E
LED lifetime	L80 B10 86.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 +2-1
Weight	1.2 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AN ANTHRACITE
BI WHITE

on request:

AG ALUMINIUM GREY
CO CORTEN
BR BRONZE

COLOUR TEMP.

27K 2700K
3K 3000K
4K 4000K

OPTIC

standard 24°

optional optics

16 16°
60 60°