
KYKLO DOWNLIGHT Ø 90 FLAT OPAL LED 4W

1234



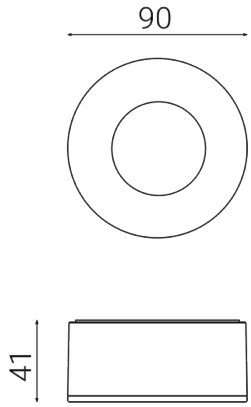

Outdoor luminaire for ceiling installation

Minimum thickness for surface installation / Recessed installation flush with the wall using backbox optional accessory

Material: low copper content die-cast aluminium

Opal diffuser, flush with the structure

Light source: mains voltage LED module, compatible with phase-cut dimmers

Rear cable entry

Stainless steel screws

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

24V 24V low voltage

Dimensions	Ø 90 x H 41 mm
Light source	LED
Wattage	4 W
Power supply	220-240 V | 50/60 Hz
Light source output	380 lm
System output	68 lm
System efficiency	17 lm/W
Color Rendering Index – CRI	≥80
LED energy class	F
LED lifetime	L70 B10 > 45.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 / -2-1
Weight	0.32 kg
Conformity	CE UKCA

CODE OPTIONS

FINISH

AN	ANTHRACITE
BI	WHITE

on request:

AG	ALUMINIUM GREY
CO	CORTEN
BR	BRONZE

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

KYKLO DOWNLIGHT Ø 90 FLAT OPAL LED 4W

1234

ACCESSORIES

KYKLO
BACKBOX



1239

Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it