
DART Ø 55 OPAL LED 4W

1655



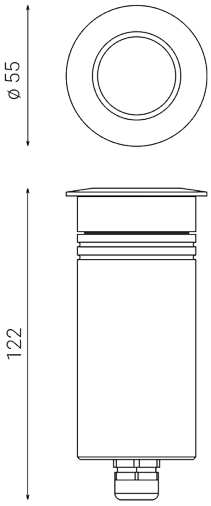

Outdoor ground/wall/ceiling recessed luminaire

Material: housing and covering ring in anodized anticorodal turned aluminium for OS and ON finishes; housing in anodized anticorodal turned aluminum and covering ring in AISI 316L stainless steel for IN finish

Diffuser: ultra-white opal tempered glass

Built-in driver

Light source: LED unit

Supplied with 1,5 m cable

Finish: anodization for OS and ON versions; satin finish for IN version

On request versions (additional code):
MT7 7 m cable length

Dimensions	Ø 55 x H 122 mm
Light source	LED
Wattage	4 W
Power supply	220-240 V | 50/60 Hz
Light source output	470 lm
System output	44 lm
System efficiency	11 lm/W
Color Rendering Index – CRI	80
LED energy class	E (3000K), E (4000K), F (2700K)
LED lifetime	L80 B10 86.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65/67
Impact resistance rating	IK 08 (5 Joules)
Diffuser contact temperature	≤ 40°C
Norms	EN 60598-1 / -2-13
Weight	0.47 kg
Conformity	CE UKCA

CODE OPTIONS

FINISH		COLOUR TEMP.	
OS	NATURAL ANODIZATION	**27K**	2700K
ON	BLACK ANODIZATION	**3K**	3000K
IN	STAINLESS STEEL	**4K**	4000K

on request:

goccia ILLUMINAZIONE
Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

IMQ CERTIFIED QUALITY MANAGEMENT SYSTEM ISO 9001:2015
IQNET RECOGNIZED CERTIFICATION

DART Ø 55 OPAL LED 4W

1655

BI WHITE

DART Ø 55 OPAL LED 4W

1655

ACCESSORIES

DART
Ø 55 CLIP



1650

DART
Ø 55-60 230V CYLINDRICAL RECESSED BOX



1651

DART
Ø 55-60 230V RECESSED BOX



1652

Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it