

goccia ILLUMINAZIONE

VOID POST H 600 LED 9W

1353

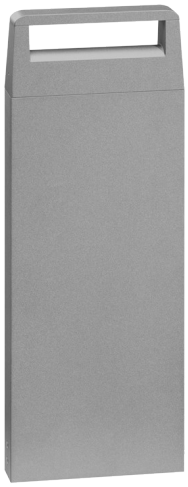

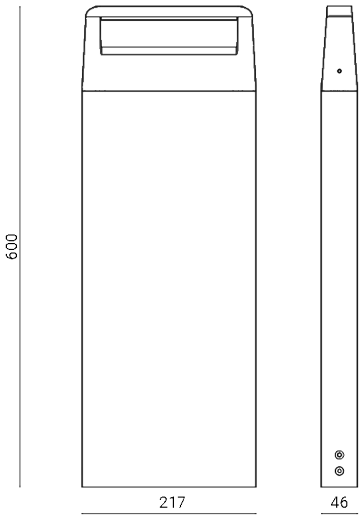

Pole complete with luminaire

Material: low copper content die-cast aluminium luminaire / Extruded aluminium pole / Stainless steel base

Photo-etched polycarbonate diffuser to grant a homogeneous effect with diffused light

Built-in driver

Light source: LED unit

Supplied with H05RN-F pre-wired cable (optional waterproof connections to be ordered separately)

Stainless steel screws

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

D* Dimmable version

LV 24÷48V low voltage

Dimensions	217 x 46 x H 600 mm
Light source	LED
Wattage	9 W
Power supply	100-240 V | 50/60 Hz
Light source output	1077 lm
System output	745 lm
System efficiency	83 lm/W
Color Rendering Index – CRI	80
LED energy class	F
LED lifetime	L70 B50 > 50.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 66
Impact resistance rating	IK 07 (2 Joules)
Norms	EN 60598-1 / -2-1
Weight	3.1 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH		COLOUR TEMP.		OPTIC	
AN	ANTHRACITE	**27K**	2700K	**standard**	DIFFUSE
CO	CORTEN	**3K**	3000K		
BR	BRONZE	**4K**	4000K		

VOID POST H 600 LED 9W

1353

ACCESSORIES

ACCESSORIES
WATERPROOF CONNECTOR



1941

ACCESSORIES
WATERPROOF CONNECTOR



1944

ACCESSORIES
WATERPROOF CONNECTOR



1942

ACCESSORIES
ANCHOR PLATE



1358