


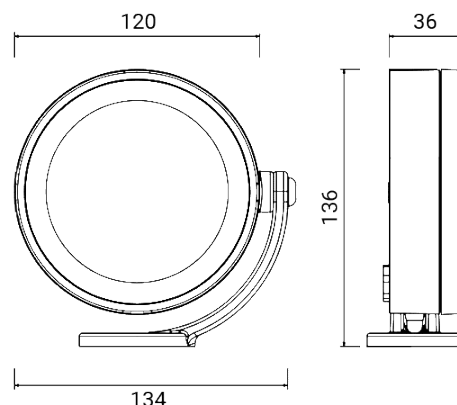

Outdoor spotlight for wall, stem and ground installation

Adjustable luminaire with stable fastening in the chosen point

Material: low copper content die-cast aluminium

Diffuser: ultra-white transparent tempered glass, sealed to the frame

External 24 Vdc driver for parallel connection, compliant with EN 61347-2-13 Standard, to be ordered separately

Light source: 3 RGBW LEDs and a device to receive DMX standard 512 signal sent from the control unit 1181 or another compatible unit

Supplied with 0,5 m cable: signal + 24V power supply

Up to 32 luminaires can be connected to each control unit

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

Dimensions	Ø 120 x H 136 x 36 mm
Light source	LED RGBW (W = 3000K)
Wattage	max 25 W
Power supply	24 Vdc
Light source output	990 lm
System output	690 lm
System efficiency	28 lm/W
Electrical insulation class	Class III
IP rating	IP 67
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 +2-1
Weight	0.72 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE
BR	BRONZE
VE	GREEN

on request:

CO	CORTEN
BI	WHITE

OPTIC

standard 30°

optional optics

10 10°

54 54°

ACCESSORIES

CLOCK STEM H 600  4693	CLOCK STEM H 1200  4694	CLOCK STEM H 2300  4699	CLOCK 120 SHIELD  4669
CLOCK STEM JOINT  4695	CLOCK SPIKE  4691	CLOCK WALL ARM 380  4692	CLOCK STEM WALL SUPPORT  4681
CLOCK STEM WALL 900  4682	CLOCK STEM WALL 1800  4683	ACCESSORIES SIGNAL GENERATOR  1181	ACCESSORIES 24V DRIVER - 24W  1924
ACCESSORIES 24V DRIVER - 60W  1925	ACCESSORIES 24V DRIVER - 150W  1926		