


FLUTE URBAN H 2680 BURIABLE LED 29W

7031

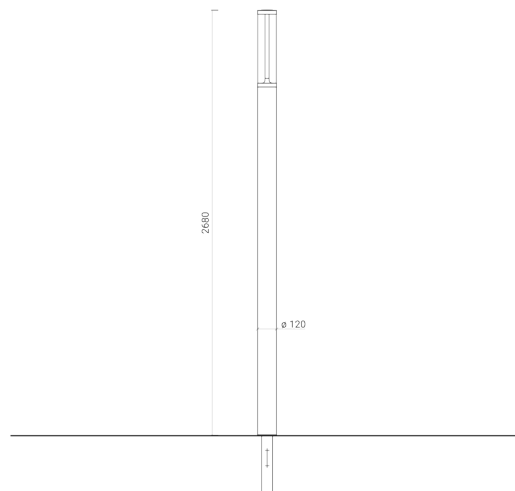

Urban lighting pole complete with luminaire

Anti-glare upper collar and photo-etched optical disc built into the lamp body

Equipped with buriable anchoring unit

Material: low copper content die-cast aluminium luminaire / Extruded aluminium pole

Diffuser: clear polycarbonate

Built-in driver

Light source: circle ring LED module

Watertight wiring through the supplied cable that powers the integrated driver. Further M16 cable gland for additional wiring, positioned in the lower part of the closing cap in technopolymer

Optional surge protection device (SPD) to be ordered separately

Stainless steel screws

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

CL2 Class II

D* Dimmable version

Dimensions	Ø 120 x H 2680 mm
Light source	LED
Wattage	29 W
Power supply	220-240 V 50/60 Hz
Light source output	4150 lm
System output	1751 lm
System efficiency	60 lm/W
Color Rendering Index – CRI	80
LED energy class	B (4000K), C (2700K), C (3000K)
LED lifetime	L80 B10 53.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 66
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 +2-1
Conformity	CE UK CA

CODE OPTIONS

FINISH

AN ANTHRACITE

COLOUR TEMP.

27K 2700K
3K 3000K
4K 4000K

FLUTE URBAN H 2680 BURIABLE LED 29W 7031



ACCESSORIES

