goccia ILLUMINAZIONE

K³ MIKRO SPOT LED 4W

1037



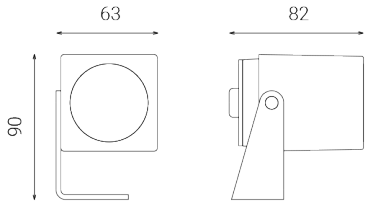

Outdoor spotlight for ground installation

Material: low copper content die-cast aluminium

Ultra-white transparent tempered glass diffuser, flush with the structure and black silk-screened

Light source: mains voltage LED module, compatible with phase-cut dimmers

Supplied with 1,5 m cable

Stainless steel screws

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

24V 24V low voltage

Dimensions	63 x 82 x H 90 mm
Light source	LED
Wattage	4 W
Power supply	220-240 V | 50/60 Hz
Light source output	380 lm
System output	298 lm
System efficiency	75 lm/W
Color Rendering Index – CRI	≥80
LED energy class	F
LED lifetime	L70 B10 > 45.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 65
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 / -2-1
Weight	0.61 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE
CO	CORTEN
BR	BRONZE
BI	WHITE

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

OPTIC

standard	30°

optional optics

17	17°
54	54°

goccia ILLUMINAZIONE

Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

IMQ CERTIFIED QUALITY MANAGEMENT SYSTEM ISO 9001:2015

IQNET RECOGNIZED CERTIFICATION

K³ MIKRO SPOT LED 4W

1037

ACCESSORIES

ACCESSORIES
SPIKE



1600