goccia ILLUMINAZIONE

K³ POWER LED 2x LED 32W

1162



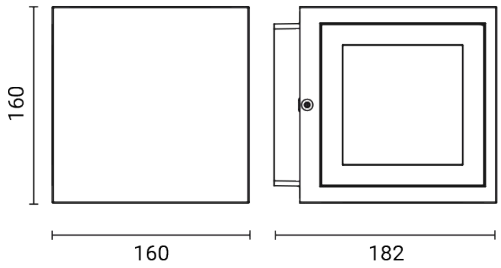

Outdoor luminaire for wall installation

Material: low copper content die-cast aluminium

Diffuser: ultra-white transparent tempered glass

Built-in driver

Light source: LED unit

Rear cable entry

Color matching stainless steel Allen screws

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

D* Dimmable version

+ Independent up+down optics

Dimensions	160 x 160 x 182 mm
Light source	LED
Multiple sources	2x
Wattage	32 W
Power supply	220-240 V | 50/60 Hz
Light source output	3629 lm
System output	3144 lm
System efficiency	98 lm/W
Color Rendering Index – CRI	80
LED energy class	E (3000K), E (4000K), F (2700K)
LED lifetime	L80 B10 86.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class II
IP rating	IP 65
Impact resistance rating	IK 08 (5 Joules)
Norms	EN 60598-1 / -2-1
Weight	4.6 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

AG	ALUMINIUM GREY
AN	ANTHRACITE
BI	WHITE

on request:

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

OPTIC

standard 37°

optional optics

14	14°
55	55°

goccia ILLUMINAZIONE

Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

IMQ CERTIFIED QUALITY MANAGEMENT SYSTEM ISO 9001:2015

IQNET RECOGNIZED CERTIFICATION

K³ POWER LED 2x LED 32W

1162

CO	CORTEN
BR	BRONZE

Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

IMQ CERTIFIED QUALITY MANAGEMENT SYSTEM ISO 9001:2015
IQNET RECOGNIZED CERTIFICATION

K³ POWER LED 2x LED 32W

1162

ACCESSORIES

K³ POWER
ARTICULATED BRACKET



1191

K³ POWER THE SERIES



