
LATO ALTO 1000 LED 19W

7203



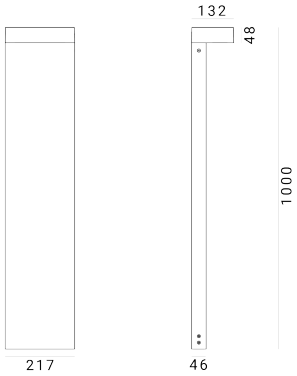

Pole complete with luminaire

Material: low copper content die-cast aluminium luminaire / Extruded aluminium pole / Stainless steel base

Diffuser: clear polycarbonate

Built-in driver

Light source: highly performing LED module

Dedicated optics

Watertight wiring through the supplied cable that powers the integrated driver. Further M16 cable gland for additional wiring, positioned in the lower part of the luminaire

Optional surge protection device (SPD) to be ordered separately

Stainless steel screws

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

D* Dimmable version

Dimensions	217 x 132 x H 1000 mm
Light source	LED
Wattage	19 W
Power supply	220-240 V | 50/60 Hz
Light source output	2106 lm
System output	1655 lm
System efficiency	87 lm/W
Color Rendering Index – CRI	80
LED energy class	D
LED lifetime	L90 B10 > 100.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 66
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 / -2-1
Weight	5.7 kg
Conformity	CE UKCA

CODE OPTIONS

FINISH

AN	ANTHRACITE

COLOUR TEMP.

27K	2700K
3K	3000K
4K	4000K

OPTIC

standard	150° X 45°

optional optics

100	100° SYMMETRIC

LATO ALTO 1000 LED 19W

7203

ACCESSORIES

ACCESSORIES
SPD



1965

ACCESSORIES
ANCHOR PLATE



1358

Goccia Illuminazione srl
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

IMQ CERTIFIED QUALITY MANAGEMENT SYSTEM ISO 9001:2015
IQNET RECOGNIZED CERTIFICATION