
goccia ILLUMINAZIONE

LATO ALTO 2300 WITH BASE LED 27W

7205



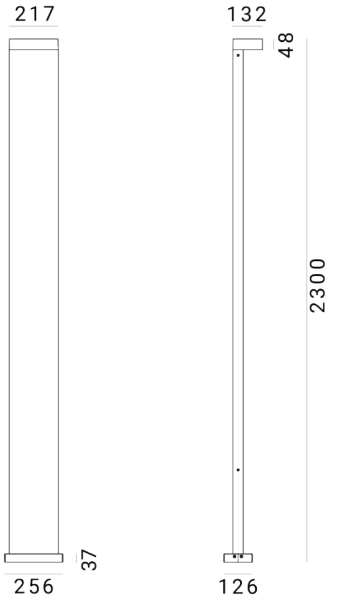

Urban lighting pole complete with luminaire

Equipped with base

Material: low copper content die-cast aluminium luminaire / Extruded aluminium pole

Diffuser: clear polycarbonate

Built-in driver

Light source: highly performing LED module

Dedicated optics

Watertight wiring through the supplied cable that powers the integrated driver. Further M16 cable gland for additional wiring, positioned in the lower part of the luminaire

Optional surge protection device (SPD) to be ordered separately

Stainless steel screws

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

D* Dimmable version

Dimensions	217 x 132 x H 2300 mm
Light source	LED
Wattage	27 W
Power supply	220-240 V | 50/60 Hz
Light source output	2908 lm
System output	2184 lm
System efficiency	81 lm/W
Color Rendering Index – CRI	80
LED energy class	D
LED lifetime	L90 B10 > 100.000 h
Standard Deviation Color Matching (SDCM)	MacAdam step 3
Electrical insulation class	Class I
IP rating	IP 66
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 / -2-1
Weight	14.4 kg
Conformity	CE UK CA

CODE OPTIONS

FINISH

COLOUR TEMP.

OPTIC

goccia ILLUMINAZIONE

Goccia Illuminazione srl

via E.Fermi 59/65 - 25020 Poncarale (BS) Italy

+39 030 2640761 - info@www.goccia.it

IMQ CERTIFIED QUALITY MANAGEMENT SYSTEM ISO 9001:2015

IQNET RECOGNIZED CERTIFICATION

LATO ALTO 2300 WITH BASE LED 27W

7205

AN	ANTHRACITE

27K	2700K
3K	3000K
4K	4000K

standard	150° X 45°

optional optics

100	100° SYMMETRIC
N	NARROW 90° X 30°

LATO ALTO 2300 WITH BASE LED 27W

7205

ACCESSORIES

ACCESSORIES
SPD



1965