
PASSUM UP RGBW Ø 125 ALUMINIUM LED RGBW 12W MAX

1462



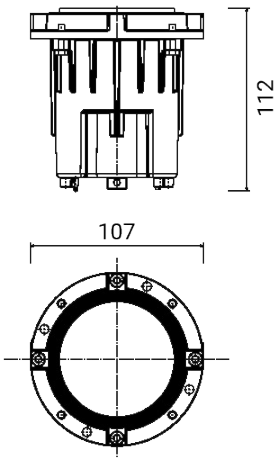

Outdoor ground/wall recessed luminaire

Max. load pressure 2.000 kg (in-ground box + luminaire + covering flange together for drive-over use)

Material: low copper content die-cast aluminium

Diffuser: ultra-white transparent tempered glass

External 24 Vdc driver for parallel connection, compliant with EN 61347-2-13 Standard, to be ordered separately

Light source: 1 RGBW LED and a device to receive DMX standard 512 signal sent from the control unit code 1181 or another compatible unit

Adjustable optics ±15°

Supplied with 0,5 m cable: signal + 24V power supply

Up to 32 luminaires can be connected to each control unit

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

** Multi-channel setting

Dimensions	Ø 107 x H 112 mm
Light source	LED RGBW (W = 6500K)
Wattage	max 12 W
Power supply	24 Vdc
Light source output	330 lm
System output	230 lm
System efficiency	19 lm/W
Electrical insulation class	Class III
IP rating	IP 65/67
Impact resistance rating	IK 10 (20 joules)
Diffuser contact temperature	≤ 40°C
Norms	EN 60598-1 / -2-13
Weight	0.7 kg
Conformity	CE UKCA

CODE OPTIONS

OPTIC

standard	30°

optional optics

10	10°
54	54°

PASSUM UP RGBW Ø 125 ALUMINIUM LED RGBW 12W MAX

1462

COMPONENTS

PASSUM
Ø 125 IN-GROUND BOX



1421

PASSUM UP
Ø 125 ALUMINIUM ROUND FLANGE



1521

PASSUM UP
Ø 125 STAINLESS STEEL ROUND FLANGE



1522

PASSUM UP
Ø 125 STAINLESS STEEL SQUARE FLANGE



1523

ACCESSORIES

ACCESSORIES
SIGNAL GENERATOR



1181

ACCESSORIES
24V DRIVER – 24W



1924

ACCESSORIES
24V DRIVER – 60W



1925

ACCESSORIES
24V DRIVER – 150W



1926