
# PASSUM UP RGBW Ø 180 ALUMINIUM LED RGBW 25W MAX

## 1464



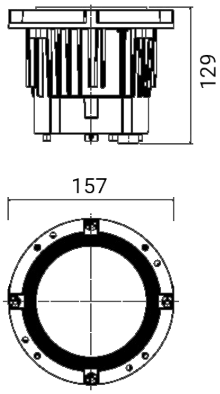


Outdoor ground/wall recessed luminaire

Max. load pressure 2.300 kg (in-ground box + luminaire + covering flange together for drive-over use)

Material: low copper content die-cast aluminium

Diffuser: ultra-white transparent tempered glass

External 24 Vdc driver for parallel connection, compliant with EN 61347-2-13 Standard, to be ordered separately

Light source: 3 RGBW LEDs and a device to receive DMX standard 512 signal sent from the control unit 1181 or another compatible unit

Adjustable optics ±15°

Supplied with 0,5 m cable: signal + 24V power supply

Up to 32 luminaires can be connected to each control unit

Finish with double painting (epoxy-based primer and polyester powder coating) after anti-corrosion treatments

On request versions (additional code):

** Multi-channel setting

| | |
|---|---|
| Dimensions | Ø 157 x H 129 mm |
| Light source | LED RGBW (W = 3000K) |
| Wattage | max 25 W |
| Power supply | 24 Vdc |
| Light source output | 990 lm |
| System output | 690 lm |
| System efficiency | 28 lm/W |
| Electrical insulation class | Class III |
| IP rating | IP 65/67 |
| Impact resistance rating | IK 10 (20 joules) |
| Diffuser contact temperature | ≤ 40°C |
| Norms | EN 60598-1 / -2-13 |
| Weight | 1.4 kg |
| Conformity | CE UKCA |

## CODE OPTIONS

### OPTIC

| | |
|---|---|
| **standard** | 30° |

optional optics

| | |
|---|---|
| **10** | 10° |
| **54** | 54° |

**Goccia Illuminazione srl**
via E.Fermi 59/65 - 25020 Poncarale (BS) Italy
+39 030 2640761 - info@www.goccia.it

# PASSUM UP RGBW Ø 180 ALUMINIUM LED RGBW 25W MAX

## 1464

## COMPONENTS

**PASSUM**
Ø 180 IN-GROUND BOX



1431

**PASSUM UP**
Ø 180 ALUMINIUM ROUND FLANGE



1531

**PASSUM UP**
Ø 180 STAINLESS STEEL ROUND FLANGE



1532

**PASSUM UP**
Ø 180 STAINLESS STEEL SQUARE FLANGE



1533

## ACCESSORIES

**ACCESSORIES**
SIGNAL GENERATOR



1181

**ACCESSORIES**
24V DRIVER – 60W



1925

**ACCESSORIES**
24V DRIVER – 150W



1926