

goccia ILLUMINAZIONE

RUNNER RGBW L LED RGBW 47W

1778

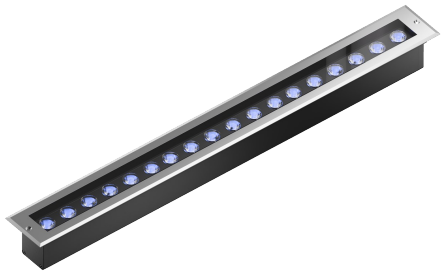



Outdoor ground recessed luminaire

Max. load pressure 1.300 kg for walk-over use

Material: AISI 316L stainless steel rectangular flange / Extruded aluminium housing / Side covers in low copper content die-cast aluminium alloy 44300

Diffuser: ultra-white transparent tempered glass

Built-in driver

Light source: RGBW LED unit for DMX standard 512 signal sent from the control unit code 1181 or another compatible unit

Up to 32 luminaires can be connected to each control unit

Supplied with two cables: signal + 230V power supply

Stainless steel Allen screws

Satin finish

Dimensions	910 x 99 x 85 mm
Light source	LED RGBW (W = 3000K)
Wattage	47 W
Power supply	220-240 V | 50/60 Hz
System output	1557 lm
System efficiency	33 lm/W
Electrical insulation class	Class II
IP rating	IP 65/67
Impact resistance rating	IK 10 (20 joules)
Norms	EN 60598-1 / -2-13
Conformity	CE UKCA

On request versions (additional code):

A2 Optional shield
24V 24V low voltage
I/O Through wiring

CODE OPTIONS

FINISH

IN STAINLESS STEEL

OPTIC

standard 30°

optional optics


10 10°
54 54°

RUNNER RGBW L LED RGBW 47W

1778

COMPONENTS

RUNNER
L IN-GROUND BOX



1763

ACCESSORIES

ACCESSORIES
SIGNAL GENERATOR



1181